




WF96 Double Sided butyl sealant tape.

WF-96 Double Sided Butyl Tape is 100% solids, asbestos-free butyl tape sealant that is a highly rubbery, tacky, reinforced compound designed for sealing joints in many industries. It is easy to apply and compress during installation. It exhibits excellent application and performance characteristics over a wide temperature range and will not become brittle, crack or flow during service. It is available in various sizes supplied in ready-to-use rolls, It is also available in cylinder and pads.



PRODUCT DATA:

Model	WF96
Butyl tape color	As per requirement
Tape Width	5mm-1000mm
Roll Length	15/20/30/40M
Thickness	0.5-5mm
Weight	1.65KG/m ² thickness at 1.0mm
Packing	In Nuke() + Carton

APPLICATION:

Butyl tape Sealant is designed to seal and prevent the entry of dust, air and moisture and assure a weather tight seal in many industries :


- *Metal building joints
- *Car door/windscreen sealing
- *Vacuum bag sealing
- *Roadworks
- *Cable line
- *HAVC sealing
- *Sealing between material of glass,wood, concrete,polycarbonate,plastic,marble, porcelain.etc

FEATURES:

- *No melt in hot weather or harden in cold weather
- *Anti-UV and aging. Long service life
- *Eco-friendly, No toxic or odor.
- *High tack and good adhesion.
- *For roofing, waterproofing, patching and repair
- *Easy to install, low cost and labor saving
- *Lightweight and easy to handle
- *Tough and durable – puncture and abrasion resistant
- *Stretches to allow for building movement and conforms to odd shapes

ZH98 Series



Zh98 double sided butyl sealant tape is an upgrade sealant of WF96, the sealant tape reinforced with lightweight polyester cloth to eliminate stretching and prevent creeping or sagging in service. The cloth keeps the tape in good shape in service, also has same characteristics as WF96. It is widely used in insulating glass sealing, cooling tower, roadworks.etc.

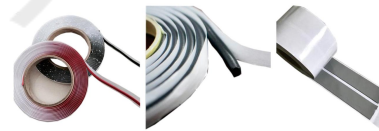

PRODUCT DATA:

Model	Zh98
Butyl tape color	Black
Tape Width	4mm/5mm/6mm,max 1000mm
Roll Length	0.4mm/0.5mm/1.0mm/1.5mm
Thickness	15/20/30/40M
Weight	1.65KG/m ² thickness at 1.0mm
Packing	Carton

Component for ZH98



Nantong Zhonghao Adhesive Products Co.,Ltd
www.zhonghaoap.com